

# HydroBlock WB™



## Product description



HydroBlock WB™ not only protects, but actively rebuilds original colour and look. HydroBlock WB™ is based on the latest nano-technology. A chemical composition of siloxanes with free reactive groups enables HydroBlock WB™ to actively bond to mineral surfaces such as concrete and protect against rain, dirt, algae, pollution, oil and others.

## Use



HydroBlock WB™ is sold in a colourless version for clay roof tiles, brick facades and mineral surfaces.

Apply directly on surfaces less than one year old. Older surfaces must first be cleaned thoroughly with a low pressure washer of minimum 70bar before treatment.

Surfaces with strong discolouration, algae or moss growth (as well as heavily soiled surfaces) should be treated with A-Clean™ and finally rinsed with water before treatment. When the surface is visibly dry (after about 24 hours depending on weather, wind and temperature), HydroBlock WB™ can be applied.

Apply with brush, roller, garden sprayer or similar. Apply about 1 litre of HydroBlock WB™ on 3-5 m<sup>2</sup> depending on surface age, property and absorbency. One treatment is sufficient for most normal surfaces. Additional treatments should be carried out within one hour of first treatment.

**Recommendation: Always make a test coat to ensure the compatibility of product and surface.**

## Technical data



**Package sizes:** 25 litres. **Use:** On dry cement, concrete, brick surfaces and minerals surfaces. **Application:** Brush, roller or sprayer. **Colour:** Colourless. **Coverage:** 1 litre covers approx. 3-5 m<sup>2</sup>. **Thinning:** Undiluted. **Dry-time:** Approx. 1 hour at 20° C and 60% RH. **Cleaning:** Clean tools etc. thoroughly in warm soapy water immediately after use. **Storage:** Dry and frost-free. Keep out of reach of children.

## Benefits

**Based on the latest nano-technology**

**Scientifically engineered cover and protect surfaces by an active binding**


**Specifically designed for concrete, clay roof tiles, wall brick facades and mineral surfaces.**

**Self-cleaning, water repellent, reconstructive.**

**Obstructs discolouration and prevents salt blooming.**

**Keeps off dirt and dust.**

**Prevents growth of moss, algae and lichens.**

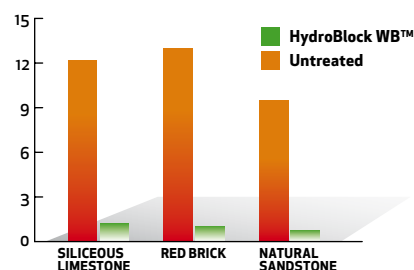

The graph above shows the visible effect HydroBlock WB™ has on reducing the water absorption of various materials.

**Iso Paint Nordic A/S**  
Tvaervej 8  
6640 Lunderskov  
Denmark

Phone +45 7633 3114  
Fax +45 7633 3115

mail@isopaint.com  
www.isopaint.com



ISO PAINT NORDIC A/S